


# DAMPPROOFING MEMBRANE DAMPFUSION



## Economical water-based gray acrylic dampproofing


DampFUSION is an excellent acrylic dampproofing membrane. DampFUSION is a fluid applied dampproofing for the exterior of below-grade masonry, block, precast and poured concrete foundation walls. It is designed to stop water vapor and help protect against leaks.

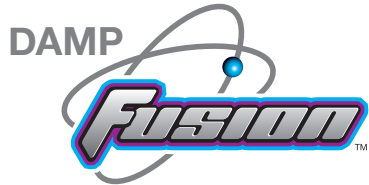

**Mar-flex DampFUSION (Water-Based)**  
RWD-01-5  
5 Gallon Bucket  
Each or 36/Pallet



**Mar-flex DampFUSION (Water-Based)**  
RWD-01-55  
55 Gallon Drum  
Each or 4/Pallet



**Flexible, seamless coating that seals out moisture**

### DampFUSION Advantages

- Water-based; no odor
- Stops water vapor transmission
- Can be applied to damp walls
- Seamless, monolithic coating
- Gray in color; blends in with concrete
- Can be applied to top of foundation walls
- Surface cures within 12-24 hours

DampFUSION Spec Sheet*	
	Water-Based
TOTAL SOLIDS	35-42%
APPLICATION METHOD	spray, brush, or roller
APPLICATION RANGE	40°-100°F
WEIGHT / GALLON	9 lbs.
COVERAGE RATE	115-125 ft. <sup>2</sup> gal

\*complete specs at Mar-flex.com

Try the complete line of Mar-flex products.

Foundation Waterproofing | Waterproofing Membranes | Dampproofing Products | Concrete Repair  
Concrete Anchor Epoxies | Drainage Boards | Egress Window Wells | Standard Window Wells  
Sealers/Mastics | Control Joint Systems | Air Barrier Systems | Vortex Vents